
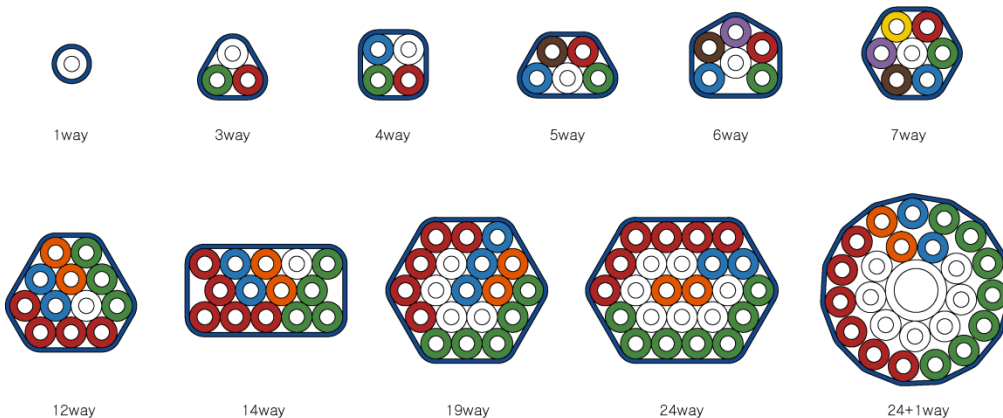


Blulight™ Thick Walled Duct

THICK WALLED DUCT is designed for direct burial by having thicker inner tube. It has advantage for easy and fast termination with thin outer sheath. The thickness of each inner tube allows individual tubes to be used direct buried solution. This item is suitable for any construction sites such as open cut, Micro trenching, Mini trenching and HDD. This product is usually recommended to the site which requires fast and easy sheath cutting during fiber branch off from the FCP.



All Knet Microduct has the excellent blowing performance with a silicone coated inner tube.

Optional Features

- Various configurations with different size between 4/2.1mm and 20/16mm
- Wide range of number of inner tube from 1 way to 24+1 way
- Ribbed & Smooth Type
- Rip cords
- Insulated Locatable copper wire

Mechanical Performance Test compliance

Tensile Performance: IEC 60794-1-21 Method E1
Bend: IEC 60794-1-21 Method E11
Kink: IEC 60794-1-21 Method E10
Impact: IEC 60794-1-21 Method E4
Crush: IEC 60794-1-21 Method E3
Inner Clearance: IEC 60794-5-20 Ann.E
 Compliant to Telcordia GR 3155-CORE

Material

HDPE Inner tube and Outer sheath

Marking

Meter marking & Customized marking

Color

Outer Sheath and Inner tube color can be customized

Temperature Performance

Storage and Transportation: -40°C to +60°C
Installation: -20°C to +50°C
Operation: -40°C to +60°C

Maximum Air Pressure (Blowing)

15bar



Microduct Assemblies Technical Details

4/2.1mm	Nom. OD (mm)	Max. Tensile (N)	Weight (kg/km)	Bend Radius (mm)	Crush (N)	Length/drum (m)	Number of drums in 40'
Single Tube	4.0	100	9	50	1,000	1,000	500
1way	5.6	200	21	70	2,000	1,000	320
7way	13.6x12.5	1,100	92	150	2,000	2,000	40
12way	17.6x16.0	1,700	144	200	2,000	2,000	32
24way	25.6x19.5	3,100	263	240	2,000	1,000	32

7/3.5mm	Nom. OD (mm)	Max. Tensile (N)	Weight (kg/km)	Bend Radius (mm)	Crush (N)	Length/drum (m)	Number of drums in 40'
Single Tube	7.0	300	28	90	1,000	2,000	104
1way	9.0	600	52	110	2,000	2,000	104
2way	16.0x9.0	1,100	93	110	2,000	2,000	40
3way	16.0x15.1	1,500	128	190	3,000	2,000	32
4way	16.0x16.0	1,900	162	200	3,000	2,000	32
5way	23.0x15.1	2,300	195	190	3,000	2,000	22
6way	21.1x19.5	2,700	228	240	3,000	2,000	22
7way	23.0x21.1	3,000	258	260	3,000	2,000	21
12way	30.0x27.2	4,900	415	330	3,000	2,000	14
14way	37.0x21.1	5,800	485	260	3,000	2,000	14
19way	37.0x33.3	7,300	627	400	3,000	1,000	19
24way	44.0x33.3	9,000	777	400	3,000	1,000	14
24+1way	43.6x43.6	10,000	855	530	3,000	1,000	12

10/6mm	Nom. OD (mm)	Max. Tensile (N)	Weight (kg/km)	Bend Radius (mm)	Crush (N)	Length/drum (m)	Number of drums in 40'
Single Tube	10.0	500	48	120	1,000	2,000	110
1way	12.0	950	81	150	2,000	1,000	104
2way	22.0x12.0	1,700	149	150	2,000	2,000	32
3way	22.0x20.7	2,400	206	250	3,000	2,000	22
4way	22.0x22.0	3,100	264	270	3,000	2,000	21
5way	32.0x20.7	3,800	320	250	3,000	2,000	18
6way	29.4x27.0	4,400	374	330	3,000	2,000	14
7way	32.0x29.3	5,100	426	360	3,000	2,000	12



12/8mm	Nom. OD (mm)	Max. Tensile (N)	Weight (kg/km)	Bend Radius (mm)	Crush (N)	Length/drum (m)	Number of drums in 40'
Single Tube	12.0	700	60	150	1,000	2,000	66
1way	14.0	1,100	99	170	2,000	2,000	40
2way	26.0x14.0	2,100	182	170	2,000	2,000	24
3way	26.0x24.4	3,000	254	300	3,000	2,000	19
4way	26.0x26.0	3,900	325	320	3,000	2,000	18
5way	38.0x24.4	4,700	395	300	3,000	2,000	12
6way	34.8x32.0	5,500	463	390	3,000	2,000	12
7way	38.0x34.8	6,300	527	420	3,000	2,000	11
7way 1.5mm sheath	39.0x35.8	7,030	586	430	3,000	2,000	11

14/10mm	Nom. OD (mm)	Max. Tensile (N)	Weight (kg/km)	Bend Radius (mm)	Crush (N)	Length/drum (m)	Number of drums in 40'
Single Tube	14.0	800	72	170	1,000	2,000	60
1way	16.0	1,140	117	200	2,000	1,000	88
2way	30.0x16.0	2,500	216	200	2,000	2,000	21
3way	30.0x28.1	2,940	301	340	3,000	2,000	13
4way	30.0x30.0	3,780	386	360	3,000	2,000	12
5way	44.0x28.1	4,600	470	340	3,000	2,000	11
6way	40.2x37.0	5,390	551	450	3,000	1,000	13
7way	44.0x40.2	6,150	628	490	3,000	1,000	12

16/12mm	Nom. OD (mm)	Max. Tensile (N)	Weight (kg/km)	Bend Radius (mm)	Crush (N)	Length/drum (m)	Number of drums in 40'
Single Tube	16.0	1,000	84	200	1,000	1,000	88
1way	18.0	1,600	135	220	2,000	2,000	27
2way	34.0x18.0	3,000	250	220	2,000	2,000	19
3way	34.0x31.9	4,100	349	390	3,000	2,000	12
4way	34.0x34.0	5,300	448	410	3,000	2,000	11
7way	50.0x45.7	8,700	729	550	3,000	1,000	11



18/14mm	Nom. OD (mm)	Max. Tensile (N)	Weight (kg/km)	Bend Radius (mm)	Crush (N)	Length/drum (m)	Number of drums in 40'
Single Tube	18.0	1,100	96	220	1,000	1,000	66
1way	20.0	1,800	153	240	2,000	1,000	36
2way	38.0x20.0	3,300	283	240	2,000	1,750	18
3way	38.0x35.6	4,700	395	430	3,000	1,000	14
4way	38.0	6,000	508	460	3,000	1,000	12
6way	51.2x47.0	8,500	728	570	3,000	1,000	10
7way	56.0x51.2	9,500	828	620	3,000	1,000	10

20/16mm	Nom. OD (mm)	Max. Tensile (N)	Weight (kg/km)	Bend Radius (mm)	Crush (N)	Length/drum (m)	Number of drums in 40'
Single Tube	20.0	1,200	108	240	1,000	1,000	30
1way	22.0	2,000	170	270	2,000	1,000	33
2way	42.0x22.0	3,700	316	270	2,000	1,000	21
3way	42.0x39.3	5,300	443	480	3,000	1,000	12
4way	42.0	6,800	569	510	3,000	1,000	12
7way	62.0x56.6	10,000	929	680	3,000	500	11

Internationally Certified

KNET has met and maintains the rigorous standards required to become a Certified ISO 9001, ISO 14001 and TL9000 manufacturer. KNET Microduct Assemblies has been rigorously tested by Telcordia Technologies and found to be compliant to Telcordia GR-3155-CORE.



This specification is intended as a guide only. Whilst the information it contains is believed to be correct, KNET can take no responsibility for action taken based on the information contained in this document. KNET reserved the right to make changes to this document without notice. All sales of product are subject to KNET's terms and conditions of sales only.

Any unauthorized copying of this document or our products is prohibited and KNET will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers.